

FDRM-1(A)

FlashScan® Dual Relay/Monitor Module



Intelligent/Addressable Devices

General

The **FDRM-1(A)** multi output-input module is designed for use with Notifier Onyx and CLIP series Fire Alarm Control Panels (FACPs).

The addressable module is intended for use in intelligent, two-wire loops. It includes two individual relay control modules and two Class B monitor modules. Each relay output is intended for Form C switching applications which do not require wiring supervision for the load circuit. Each monitor input provides an interface between a fire alarm control panel and one or more normally open contact-type devices. Each relay output has its own green LED. Each monitored input has its own bi-color LED, which can be controlled by the control panel.

Features

- Powered by SLC loop directly, no external power required.
- Mounts in standard junction boxes (4.0"/10.16 cm square, 2.125"/5.398 cm deep).
- Integral LEDs flash green during normal operation (a programmable option) and latch on steady red to indicate alarm.
- Compatible with all Notifier Onyx and CLIP series Fire Alarm Control Panels (FACPs).
- Addressable-analog communication.
- Sleek, low-profile design.
- Two-wire SLC connection.
- Rotary, decimal addressing (1-99 on CLIP systems, 1-159 on FlashScan systems).
- Addresses can be viewed and changed without electronic programmers.

Specifications

Operating Temperature: 32°F to 120°F (0°C to 49°C).

Relative Humidity: 10% – 93% non-condensing.

Size: 4.675" H x 4.275" W x 1.4" D. (Mounts to a 4" square by 2-1/8" deep box.)


Shipping Weight: 6.3 oz. (178.6 grams).

ELECTRICAL SPECIFICATIONS

Normal Operating Voltage: 15 to 32 VDC.

Maximum Current Draw: 24 mA (4 LEDs on).

Average Operating Current: 1300 μ A.

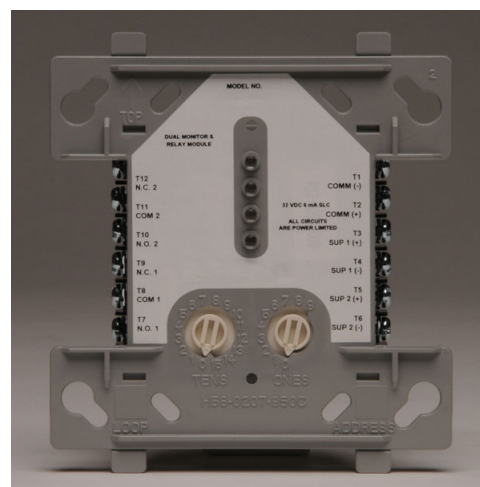

FDRM-1(A)

Relay Contact Ratings:

CURRENT RATING	MAXIMUM VOLTAGE	LOAD DESCRIPTION	APPLICATION
2 A	25 VAC	PF = 0.35	Non-coded
3 A	30 VDC	Resistive	Non-coded
2 A	30 VDC	Resistive	Coded
0.46 A	30 VDC	(L/R = 20ms)	Non-coded
0.7 A	70.7 VAC	PF = 0.35	Non-coded
0.9 A	125 VDC	Resistive	Non-coded
0.5 A	125 VAC	PF = 0.75	Non-coded
0.3 A	125 VAC	PF = 0.35	Non-coded

Installation and Programming

See installation instructions shipped with the module, and the *SLC Wiring Manual* for complete details. To ensure proper operation, these modules shall be connected to listed compatible system control panels only.

- Mount on a standard junction box (4.0"/10.16 cm square) which is at least 2.125"/5.398 cm deep.
- Terminal screws are provided for "in and out" wiring.
- Installation instructions are provided with each module.
- Surface-mount box is available as an option.
- Addressing:
 - Module base address=Relay Output #1
 - Module base address +1=Monitor Input #1
 - Module base address +2=Relay Output #2
 - Module base address +3=Monitor Input #2

Each module can use up to four (4) addresses. The base address selected with the rotary address switches will be assigned to relay output #1 from 00 to 156. The module will automatically assign the next three addresses as appropriate to monitored input #1, relay output #2, and monitored input #2.

DIP switch settings can disable relay output #2 or monitored input #2 and free up those addresses. (NOTE: This will affect addressing; see installation manual for details.)

NOTE: The inputs and outputs on FDRM-1(A) provide Style B (Class B) circuits ONLY. Style D (Class A) circuits are NOT supported in any application.

Agency Listings and Approvals

These listings and approvals apply to the modules specified in this document. In some cases, certain modules or applications may not be listed by certain agencies, or listing may be in process. Consult factory for latest listing status.

- **UL/ULC Listed:** S635
- **CSFM:** 7300-0028:0219

Product Line Information

NOTE: "A" suffix indicates ULC Listed model.

FDRM-1: FlashScan® Dual Relay/Monitor Module.

FDRM-1A: Same as above but with ULC Listing.

SMB500: Surface-mount electrical box.

DNR(A)/DNRW: Duct detector housing.

EA-CB: Control module barrier.

NOTIFIER® and FlashScan® are registered trademarks of Honeywell International Inc.

©2012 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.
We try to keep our product information up-to-date and accurate.
We cannot cover all specific applications or anticipate all requirements.
All specifications are subject to change without notice.



Made in the U.S. A.

For more information, contact Notifier. Phone: (203) 484-7161, FAX: (203) 484-7118.
www.notifier.com